


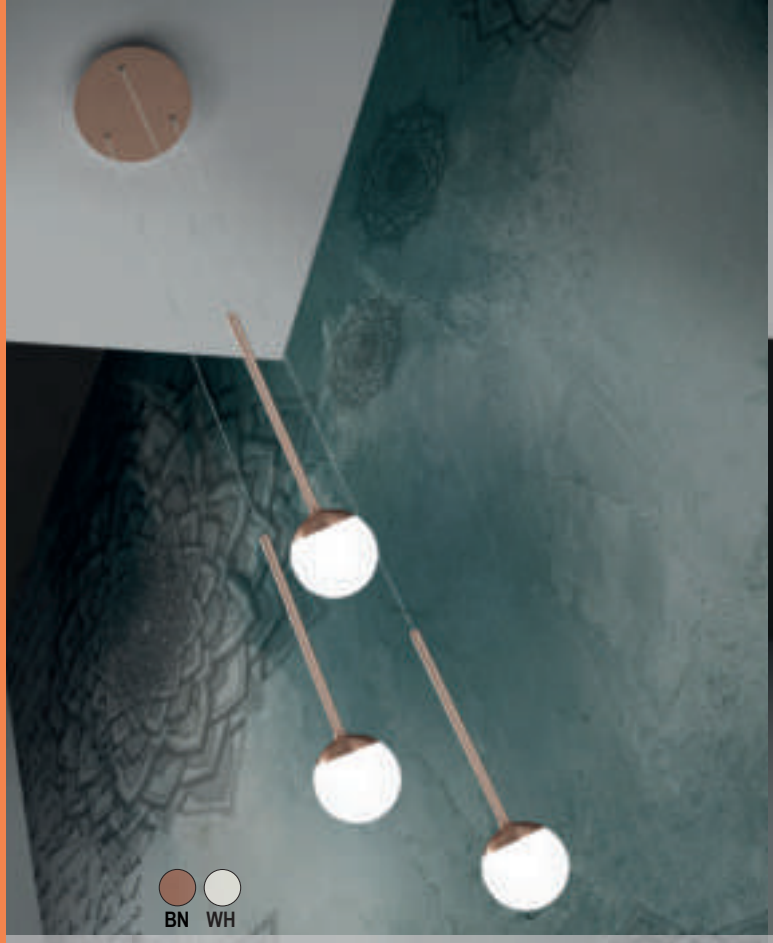

LOLLYPOP SB

Sistema a sospensione con LED integrato, montatura in metallo verniciato o anodizzato, diffusore in metacrilato bianco satinato.
Pendant system with integrated LED, painted or anodized metal frame, satin white methacrylate diffuser.

LED SMD **LED INTEGRATO** LED device

K- SWITCH 3000K - 4000K

CRI 90

B **ROSONE TIPO B** Ceiling cup type B

LOLLYPOP S1

Dimensioni / *Size*

Ø 9,9 H MAX 300 cm

Sorgente luminosa - potenza
Light source - power

LED 7 Watt
V/in 220/240 - V/out 26
LM: SOURCE 765 (REAL 753)
CCT 3000 / 4000K
IP20
CRI 90




LOLLYPOP S3B

Dimensioni / *Size*

Ø 30 P 4 H MAX 300 cm

Sorgente luminosa - potenza
Light source - power

LED 21 Watt
V/in 220/240 - V/out 55
LM: SOURCE 2294 (REAL 2259)
CCT 3000 / 4000K
IP20
CRI 90




LOLLYPOP S5B

Dimensioni / *Size*

Ø 40 P 4 H MAX 300 cm

Sorgente luminosa - potenza
Light source - power

LED 35 Watt
V/in 220/240 - V/out 80
LM: SOURCE 3824 (REAL 3765)
CCT 3000 / 4000K
IP20
CRI 90



AINTED può essere scelto fra ell'ordine se si deside l diffusore (+ 40€).
In assenza di indicazioni il rosone sarà fornito Bianco. Le composizioni saranno fornite con il rosone in tinta.
The ceiling cup for **LOLLYPOP S1 PAINTED** can be chosen from the Basic colors. Please specify in order if you want the ceiling cup in the same color as the diffuser (+ 40€).
Without any note, the ceiling cup will be supplied in white. The compositions will include a matching ceiling cup.

FINITURE DISPONIBILI *FINISHES AVAILABLE*

BASIC: WH NE BN

PAINTED: SG TO WS DG MG MC GG PF RU RA RB BX MA VS VO VB SP DB NB

PROMOLUCE.COM
EXCLUSIVE LIGHT





LOLLYPOP TR-SA

Sistema a sospensione con LED integrato, montatura in metallo verniciato o anodizzato, diffusore in metacrilato bianco satinato.
Pendant system with integrated LED, painted or anodized metal frame, satin white methacrylate diffuser.

GARANZIA 5 ANNI 5 YEARS WARRANTY


TR **ROSONE TIPO TR**
Ceiling cup type TR

LED SMD **LED INTEGRATO**
LED device

K- SWITCH
3000K - 4000K

CRI 90

A **ROSONE TIPO A**
Ceiling cup type A




LOLLYPOP S3TR

Dimensioni / *Size*

L 70 P 6,5 H MAX 300 cm

Sorgente luminosa - potenza
Light source - power

LED 21 Watt
V/in 220/240 - V/out 55
LM: SOURCE 2294 (REAL 2259)
CCT 3000 / 4000K
IP20
CRI 90




LOLLYPOP S5TR

Dimensioni / *Size*

L 120 P 6,5 H MAX 300 cm

Sorgente luminosa - potenza
Light source - power

LED 35 Watt
V/in 220/240 - V/out 80
LM: SOURCE 3824 (REAL 3765)
CCT 3000 / 4000K
IP20
CRI 90




LOLLYPOP S3A

Dimensioni / *Size*

Ø 30 P 4 H MAX 300 cm

Sorgente luminosa - potenza
Light source - power

LED 21 Watt
V/in 220/240 - V/out 55
LM: SOURCE 2294 (REAL2259)
CCT 3000 / 4000K
IP20
CRI 90



LOLLYPOP S5A

Dimensioni / *Size*

Ø 40 P 4 H MAX 300 cm

Sorgente luminosa - potenza
Light source - power

LED 35 Watt
V/in 220/240 - V/out 80
LM: SOURCE 3824 (REAL 3765)
CCT 3000 / 4000K
IP20
CRI 90

FINITURE DISPONIBILI
FINISHES AVAILABLE

BASIC
WH NE BN

PAINTED
SG TO WS DG MG MC GG PF RU RA RB BX MA VS VO VB SP DB NB



Decentratore incluso
Spacer included



BN

LOLLYPOP SB

Sistema a sospensione con LED integrato, montatura in metallo verniciato o anodizzato, diffusore in metacrilato bianco satinato.
Pendant system with integrated LED, painted or anodized metal frame, satin white methacrylate diffuser.

LED SMD LED INTEGRATO
LED device

K- SWITCH
3000K - 4000K

CRI 90

B ROSONE TIPO B
Ceiling cup type B


LOLLYPOP S10B

Dimensioni / *Size*

Ø 70 H MAX 300 cm

Sorgente luminosa - potenza
Light source - power

LED 70 Watt
V/in 220/240 - V/out 80
LM: SOURCE 7650 (REAL 7530)
CCT 3000 / 4000K
IP20
CRI 90

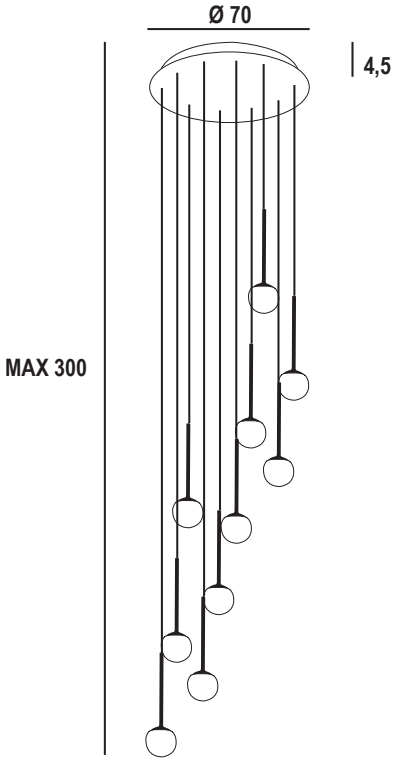

FINITURE DISPONIBILI *FINISHES AVAILABLE*

BASIC: WH NE BN

PAINTED: SG TO WS DG MG MC GG PF RU RA RB BX MA VS VO VB SP DB NB

PROMOLUCE.COM
EXCLUSIVE LIGHT



WH

LOLLYPOP SC

Sistema a sospensione con LED integrato, montatura in metallo verniciato o anodizzato, diffusore in metacrilato bianco satinato.
Pendant system with integrated LED, painted or anodized metal frame, satin white methacrylate diffuser.


GARANZIA 5 ANNI 5 YEARS WARRANTY

LED SMD **LED INTEGRATO** LED device

K- SWITCH 3000K - 4000K

CRI 90

C **ROSONE TIPO C** Ceiling cup type C

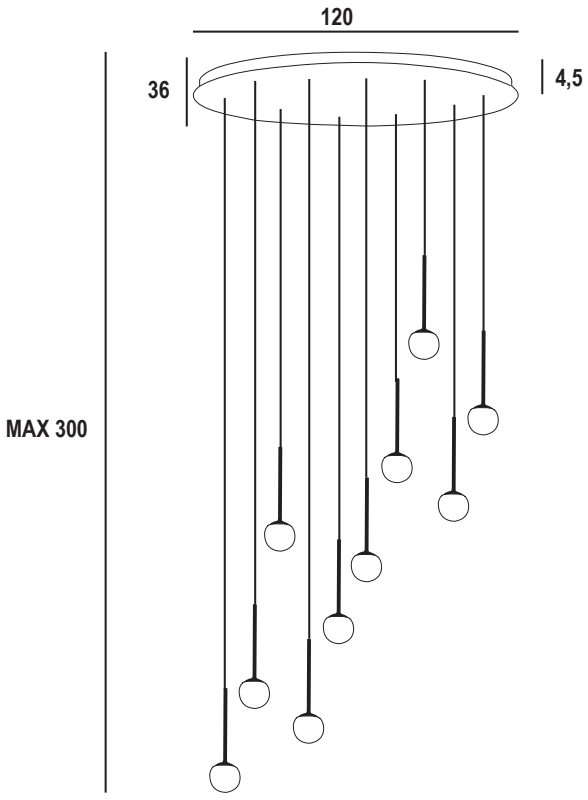

LOLLYPOP S10C

Dimensioni / *Size*

L 120 P 36 H MAX 300 cm

Sorgente luminosa - potenza
Light source - power

LED 70 Watt
V/in 220/240 - V/out 80
LM: SOURCE 7650 (REAL 7530)
CCT 3000 / 4000K
IP20
CRI 90

FINITURE DISPONIBILI *FINISHES AVAILABLE*

BASIC: WH NE BN

PAINTED: SG TO WS DG MG MC GG PF RU RA RB BX MA VS VO VB SP DB NB