



WH NE

NOOD PT

Lampada da terra sospesa in metallo verniciato bianco. LED integrato. Diffusore in silicone opalino. Dimmerabile.
Suspended floor lamp in white painted metal. Integrated LED. Opal white silicone diffuser. Dimmable.



LED INTEGRATO
LED device



K- SWITCH
3000K - 4500 - 6500K




DIMMERABILE
Dimmable



ON / OFF DIM



CLASSE II
Class II

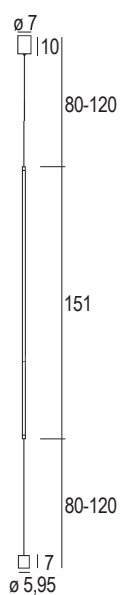

NOOD PT150

Dimensioni / Size

Ø 7 H min 246 / max 391 cm

Sorgente luminosa - potenza
Light source - power

LED 30 Watt
V/in 220/240
LM: SOURCE 2335 (REAL 1635)
CCT 3000 / 4500 / 6500K
IP20

FINITURE
DISPONIBILI
FINISHES
AVAILABLE

BASIC





NOOD S

Sospensione in metallo bianco o nero, diffusori in silicone opalino bianco LED integrato, dimmerabile e dinamica con telecomando.
Suspension in white or black metal, with diffusers in opal white silicone, integrated LED dimmable and dynamic with remote control.



LED INTEGRATO
LED device



COMANDO A DISTANZA
Remote control


NOOD S145

Dimensioni / Size

L 145 P 8,5 H 200 cm

Sorgente luminosa - potenza
Light source - power


LED 60 Watt
V/in 220/240
LM: SOURCE 4923 (REAL 3446)
CCT 3000 / 6500K
IP20

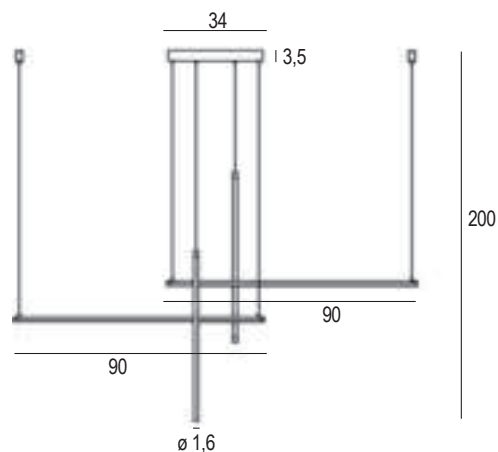

FINITURE
DISPONIBILI
FINISHES
AVAILABLE

BASIC



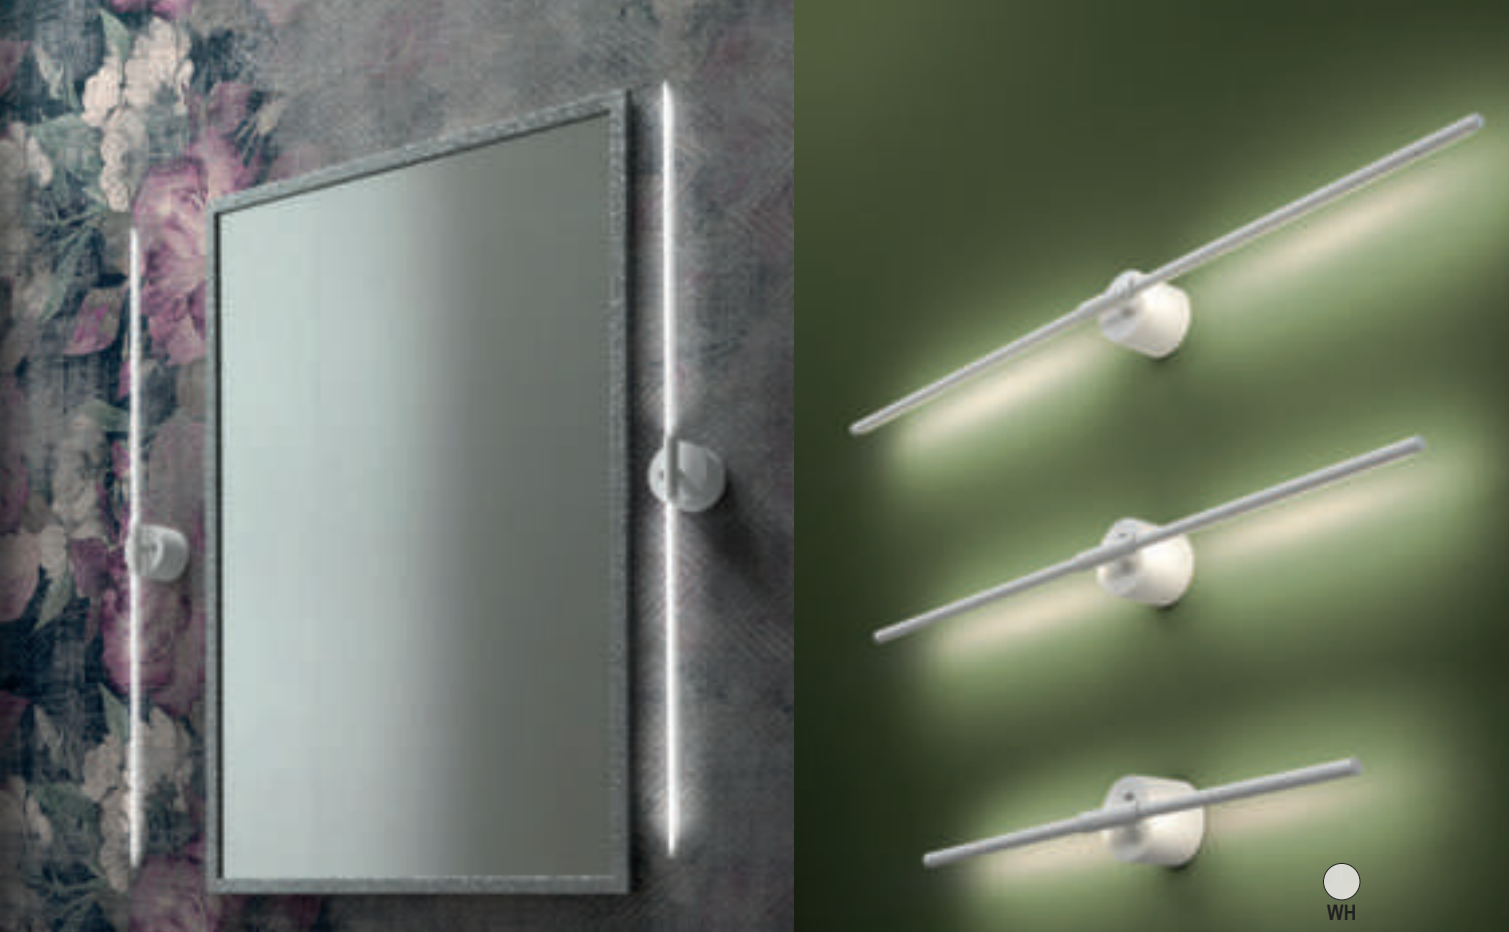

NOOD A


Lampada da parete orientabile monoemissione in metallo bianco, diffusore in silicone opalino bianco e LED integrato.
Adjustable wall lamp, unidirectional, in white metal with white opal white silicone diffuser and integrated LED.



LED INTEGRATO
LED device



K- SWITCH
3000K - 4500 - 6500K




NOOD A69

Dimensioni / Size

L 69 Ø 9 H 10 cm

Sorgente luminosa - potenza
Light source - power

LED 12 Watt
V/in 220/240
LM: SOURCE 988 (REAL 692)
CCT 3000 / 4500 / 6500K
IP20




NOOD A89

Dimensioni / Size

L 89 Ø 9 H 10 cm

Sorgente luminosa - potenza
Light source - power

LED 20 Watt
V/in 220/240
LM: SOURCE 1584 (REAL 1109)
CCT 3000 / 4500 / 6500K
IP20

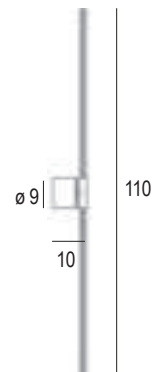

NOOD A110

Dimensioni / Size

L 110 Ø 9 H 10 cm

Sorgente luminosa - potenza
Light source - power

LED 28 Watt
V/in 220/240
LM: SOURCE 2302 (REAL 1611)
CCT 3000 / 4500 / 6500K
IP20

FINITURE
DISPONIBILI
FINISHES
AVAILABLE

BASIC



Bianco / White