




SP

T-LOW BLOCK

Proiettore lineare magnetico orientabile per binario magnetico 48V.
Adjustable linear magnetic spotlight for a 48V magnetic track.

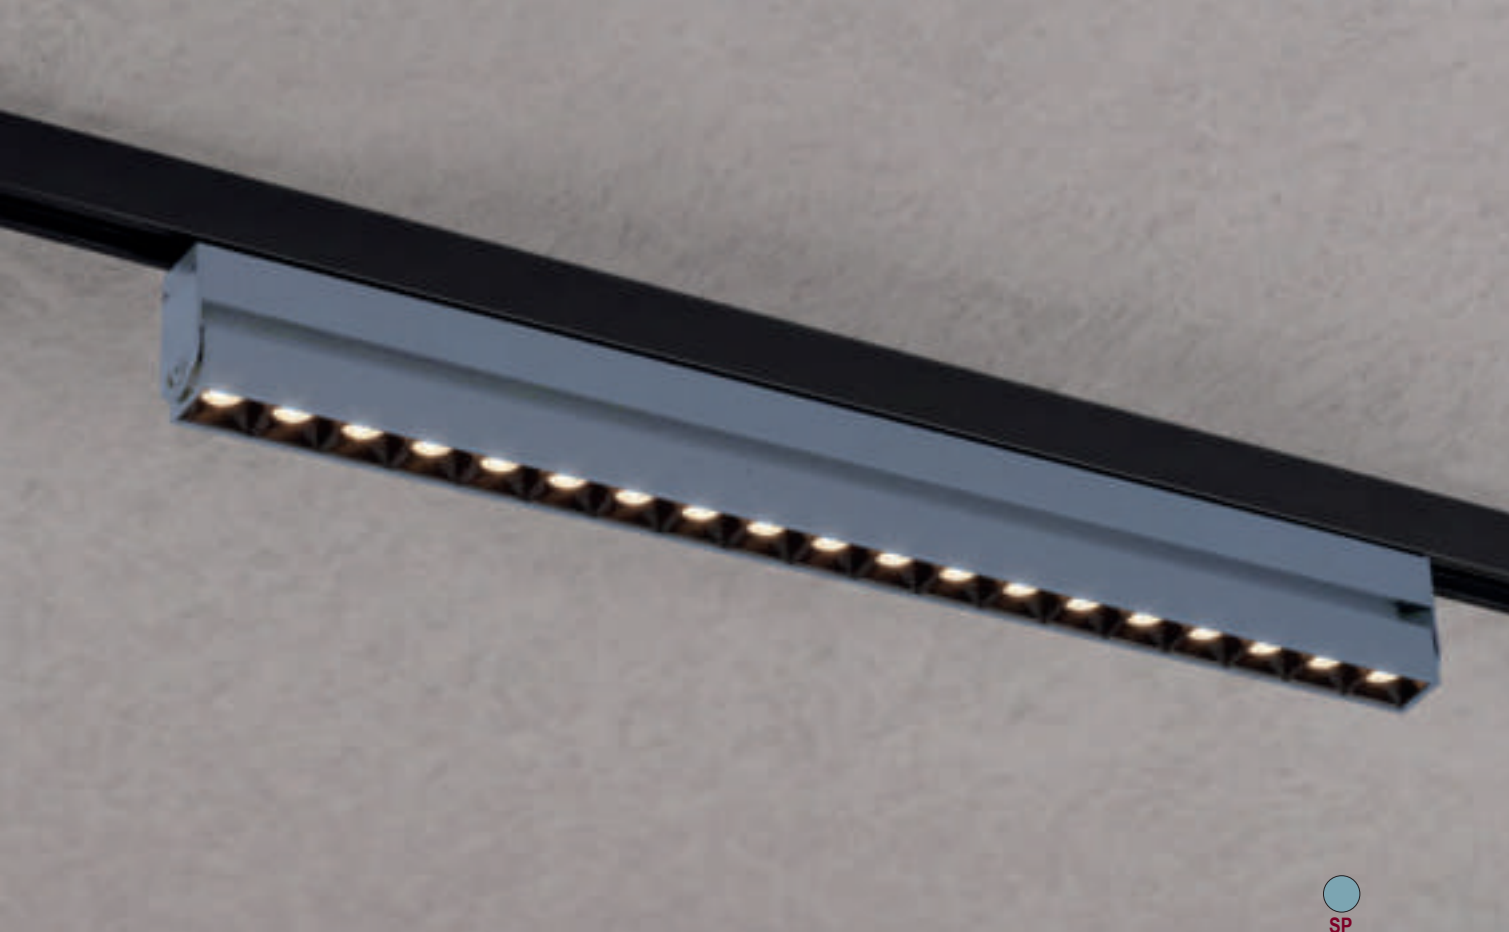

LED INTEGRATO
LED device



SISTEMA TUYA
tuya system



DIMMERABILE E DINAMICA
Dimmable and dynamic




COMANDO A DISTANZA
Remote control



ORIENTABILE 120°
120° adjustable



CRI 90

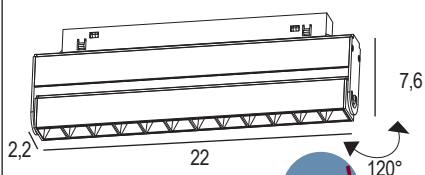

T-LOW BLOCK 12W

Dimensioni / Size

L 22 P 2,2 H 7,6 cm

Sorgente luminosa - potenza
Light source - power


LED 12 Watt

V/in 48

LM: SOURCE 1440 (REAL 1080)

CCT: 3000/4000/6000K

IP20

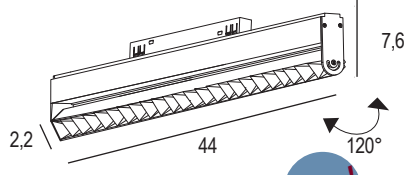

T-LOW BLOCK 24W

Dimensioni / Size

L 44 P 2,2 H 7,6 cm

Sorgente luminosa - potenza
Light source - power

LED 24 Watt

V/in 48


LM: SOURCE 2880 (REAL 2160)

CCT: 3000/4000/6000K

IP20



38°

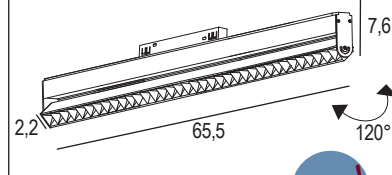

T-LOW BLOCK 36W

Dimensioni / Size

L 65,5 P 2,2 H 7,6 cm

Sorgente luminosa - potenza
Light source - power

LED 36 Watt

V/in 48

LM: SOURCE 4320 (REAL 3240)

CCT: 3000/4000/6000K

IP20

FINITURE
DISPONIBILI
FINISHES
AVAILABLE

BASIC



PAINTED

