





Alette regolabili da 8 a 20mm.
Adjustable wings from 8 to 20 mm.

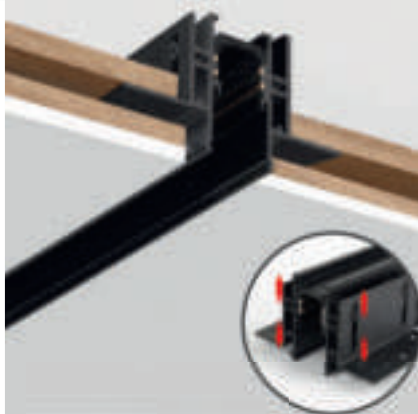

T-LOW HID

Sistema a binario magnetico da incasso 48V
48V Recessed Magnetic Track System



T-LOW HID




Dimensioni / Size

P 2,9 H 5,05 cm

V/in 48
IP20

Binario ad incasso disponibile sia in
2 o 3 metri.
Recessed track available in lengths
of 2 or 3 meters.




T-LOW HID CORNER O

Dimensioni / Size

L 8 P 8 H 4,6 cm



Copertura ad angolo 90°.
Fornito con 4 T-low Joint Brake.
90° Corner Cover.
Comes with 4 T-low Joint Brakes.




T-LOW HID CORNER V

Dimensioni / Size

L 8 P 2,6 H 8 cm



Copertura ad angolo 90° verticale.
Fornito con 4 T-low Joint Brake.
90° Vertical Corner Cover.
Comes with 4 T-low Joint Brakes.



T-LOW HID CORNER T

Dimensioni / Size

L 10 P 8 H 4,6 cm



Copertura a T con 3 entrate.
Fornito con 6 T-low Joint Brake.
3-Way T Connector Cover.
Comes with 6 T-low Joint Brakes.

Quando si uniscono 2 o più binari è necessario acquistare e installare il joint brake hid.
When joining two or more rails, you must purchase and install the hid joint brake.

FINITURE
DISPONIBILI
FINISHES
AVAILABLE

BASIC



PAINTED

